




AMERICAN SPECIALTIES, INC.
 441 Saw Mill River Road, NY 10701
 (914) 476.9000 • (914) 476.0688
 www.americanspecialties.com

MODEL №: 0462-AC-2

ISSUED: 01/87

REVISED: 09/11

SEMI-RECESSED PAPER TOWEL DISPENSER AND WASTE RECEPTACLE

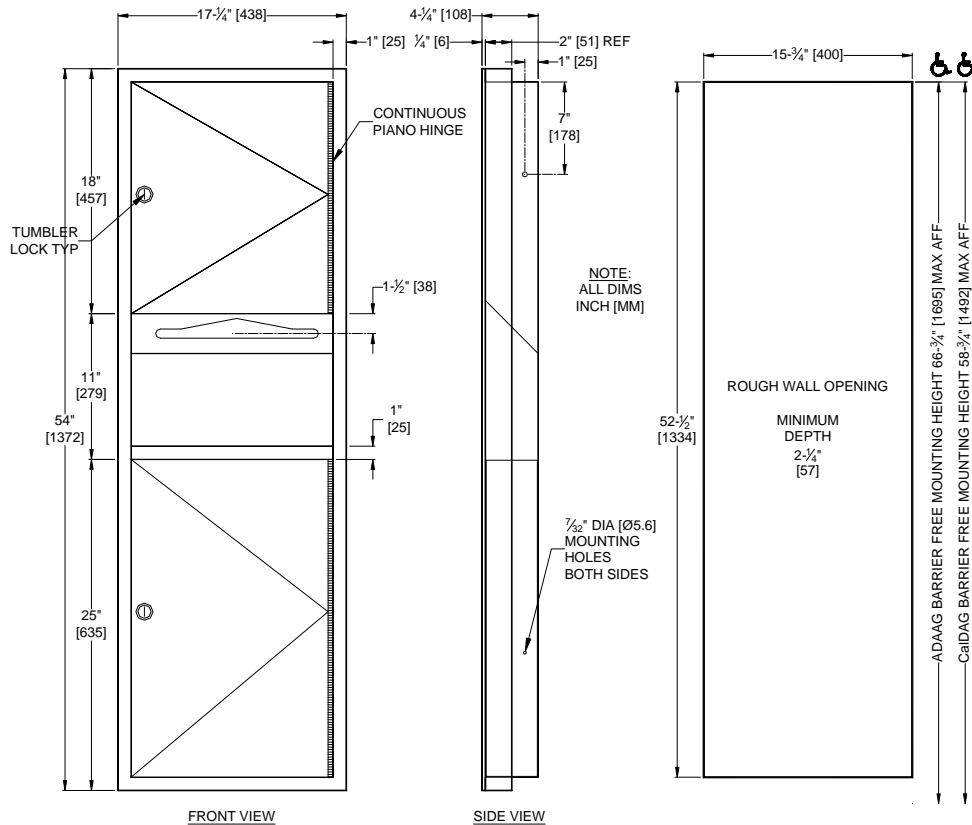

SPECIFICATION

Semi-Recessed Paper Towel Dispenser and Waste Receptacle shall hold dispense 900 standard multi-fold or 600 standard C-fold paper towels and shall have a waste capacity of 6.3 gal (24 liters). Cabinet doors and dispenser unit shall be fabricated of 22 gauge type 304 stainless steel alloy 18-8 and all exposed surfaces shall have satin finish. Towel dispensing slot shall have a fully hemmed-in folded edge for snag-free dispensing and user safety. Doors shall be fabricated in double-pan construction with fiberboard filler and shall be attached to cabinet at side with a full-length 3/16" DIA [Ø4.8] stainless steel multi-staked piano hinge and be held closed with tumbler locks keyed alike to other ASI washroom equipment. Waste container shall have hemmed edges for safety. Face trim shall be 1" [25.4] wide formed from one piece with no miters, welding or open seams and have 1/4" [6.4] square return to collar. Structural assembly of all components shall be of welded construction. SR-2 collar supplied.

Semi-Recessed Paper Towel Dispenser and Waste Receptacle shall be Model № 0462-AC-2 as manufactured by American Specialties Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

First slide SR collar on to unit.. Mount unit in wall recess using № 10 self-tapping screws (by others) through concealed mounting holes provided. For compliance with ADA Accessibility Guidelines, install unit so that towel dispenser slot is 48" [1219] maximum Above Finished Floor (AFF). Note that top of Rough Wall Opening (RWO) is 3/4" [19] below top of unit.

RWO required is 15-3/4" W X 52-1/2" H X 2-1/4" D [400 X 1334 X 57]

OPERATION

Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly. Waste container is emptied manually on cycle determined by maintenance needs. Locking compartment prevents unauthorized access or removal.