
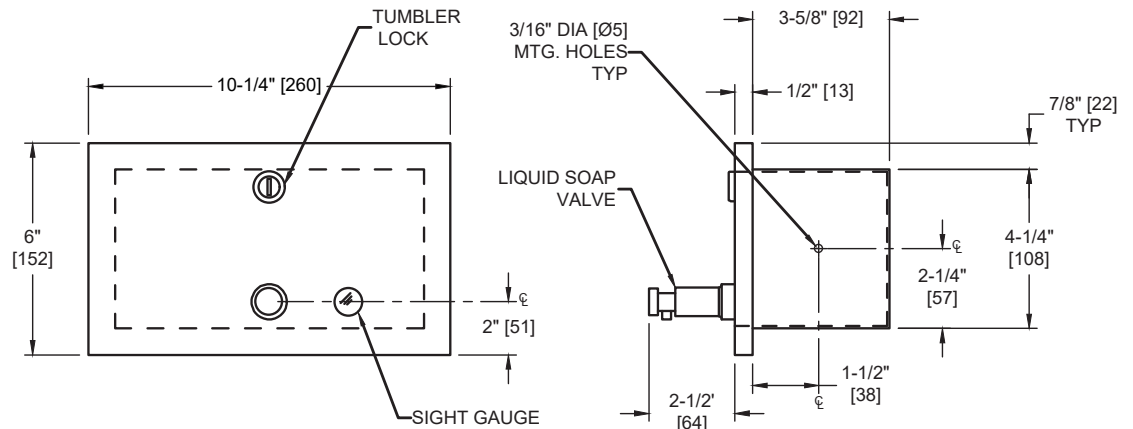


Simplicity Collection Soap Dispenser (Liquid) Horizontal – Recessed

Soap Dispensers

Simplicity

MasterFormat Section 10 28 13

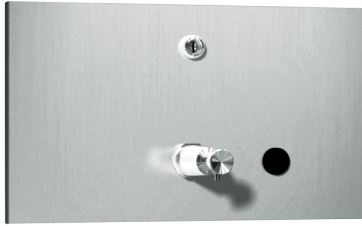

Scan for
Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
SEE SOAP DISPENSER CARE & MAINTENANCE
DOCUMENT ONLINE FOR CLEANING

PRODUCT OVERVIEW

Holds and dispenses 47 oz (1.4 liters) of liquid and lotion soaps, synthetic detergents and antibacterial soaps containing PCMX and or/Triclosan. Cabinet lies flat against wall. Door is held closed with a tumbler lock. A tamper resistant sight gauge also provided. All exposed surfaces have a satin finish. Soap is manually dispensed by pushing valve button until supply is depleted. Unit may be reloaded easily by removing door/tank assembly with a partial load in-place and will continue to feed properly. Soap Requirements: Proper usage of this dispenser requires, that only soap within the following range for viscosity and pH may be used. Viscosity Range (mPa•s or cP): 100 – 2500. pH Range: 5.5 ~ 8.0.

KEY FEATURES & SPECIFICATIONS

- Seamless construction, crisp lines and minimalistic design
- Type 304 Stainless Steel - Satin Finish
- Recessed - Horizontal
- Concealed multi-staked piano hinge - 3/16" diameter
- 47.0 oz. (1.4 L) of liquid and lotion soaps, synthetic detergents and antibacterial soaps containing PCMX and or/Triclosan

OPERATION & MAINTENANCE

Soap is manually dispensed by pushing valve button until supply is depleted. Unit may be reloaded easily by removing door/tank assembly with a partial load in-place and will continue to feed properly. Tank supply is replenished manually on cycle determined by maintenance needs.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	10-1/4" x 6" x 6-5/8" [260 x 152 x 168]
Construction	Type 304 Stainless Steel - Satin Finish with concealed multi-staked piano hinge - 3/16" diameter
Mounting	Recessed - Horizontal
Options	N/A

INSTALLATION

Unit is mounted in wall recess using two (2) #10 self-threading screws (by others) through concealed mounting holes provided. For compliance with ADA Accessibility Guidelines, unit should be installed so that valve is 54" [1372] maximum Above Finished Floor (AFF) if clear floor side reach access is provided or 48" [1219] maximum AFF if clear floor forward reach access only is provided or 46" [1168] maximum AFF if side reach over an obstruction only is provided (i.e.: vanity). Note that top of RWO is 9/16" [14] below top of unit.

Rough Wall Opening (RWO) required is 9" W x 4-7/8" H x 4" D minimum [229 x 124 x 102]

WARRANTY

One (1) Year from date of invoice