




**AMERICAN SPECIALTIES, INC.**  
 441 Saw Mill River Road, Yonkers, NY 10701  
 (914) 476.9000 • (914) 476.0688  
 www.americanspecialties.com

<b>MODEL №:</b>	<b>8340</b>
<b>ISSUED:</b>	<b>10-04</b>
<b>REVISED:</b>	<b>3 NOV 2016</b>

## RECESSED MEDICINE CABINET WITH MIRROR SWING DOOR

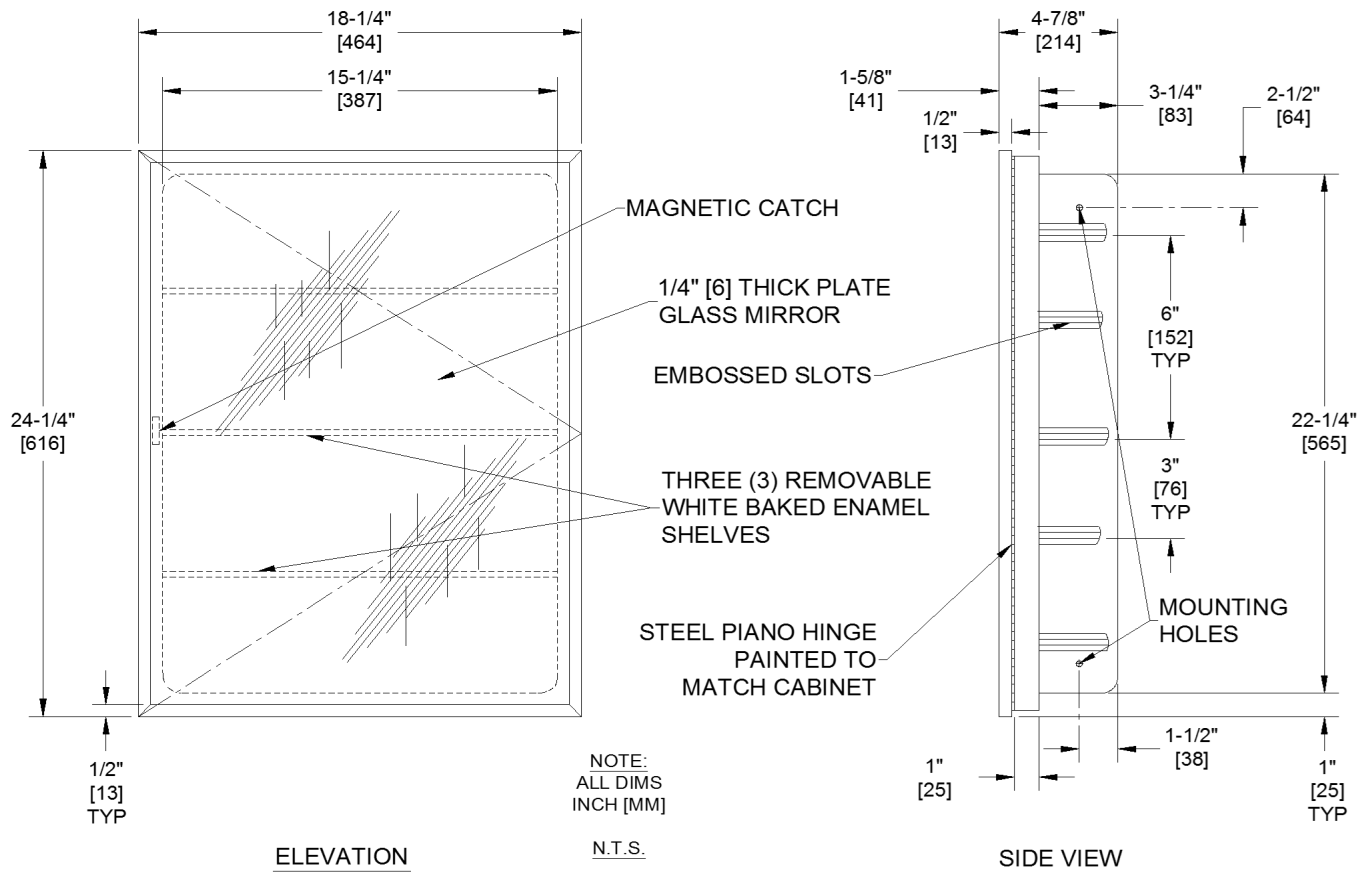

### SPECIFICATION

Recessed Medicine Cabinet with Mirror Swing-Door shall be fabricated of 23 gauge cold rolled steel with a white baked enamel finish. Cabinet interior shall have radius corners and shall be provided with three (3) removable white enamel steel shelves. Interior face trim shall be one-piece construction with no miters and no exposed fasteners or welded seams. Mirror glazing shall be 1/4" [6] thick polished float/plate glass and shall have a warranty against silver spoilage for fifteen (15) years. Stainless steel door channel frame shall be attached to cabinet with a full-length, heavy duty piano hinge, painted to match cabinet and shall be held closed by a magnetic catch. Cabinet shall have two (2) rubber door silencers.

**Recessed Medicine Cabinet shall be Model № 8340 as fabricated by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913**

### INSTALLATION

Unit is mounted in wall recess using four (4) №10 screws by others through concealed mounting holes provided in cabinet sides. For maximum usability, typical mounting height is 46" [1168] from bottom of mirror door above finish floor (AFF) or 12" [305] above lavatory counter top. For compliance with 2010 ADA Accessibility Standards, unit should be installed so that bottom edge of reflecting surface is no higher than 40" [1016] maximum AFF. Note that bottom edge of reflecting surface is 3/4" [19] below rough wall opening (RWO). Cabinet can be inverted to change left hand swing (shown) to right hand swing as required at installation site.

**RWO required is..... 16" W x 22-3/4" H x 3-1/2" D [406 x 578 x 89]**

### OPERATION

User pulls door to access contents and manually pushes door shut. Shelf spacing may be adjusted by removing shelves and inserting in any of five (5) internally embossed tracks on each side of cabinet interior.