



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 9600

ISSUED: 1-87

REVISED: 9-04

INTER-LOK STAINLESS STEEL FRAMED MIRROR

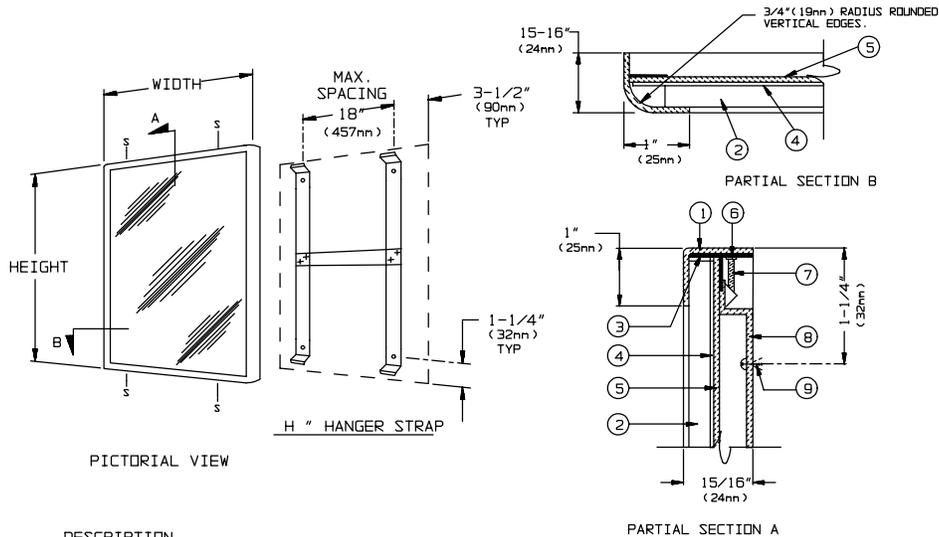

DESCRIPTION

- | | |
|---|--|
| <ol style="list-style-type: none"> 1. FRAME 16 GAUGE STAINLESS STEEL 2. 1/4" PLATE GLASS MIRROR 3. SHOCK-ABSORBING EDGE CUSHION 4. NON-ABSORBENT FILLER 5. 20 GAUGE STEEL BACK PLATE | <ol style="list-style-type: none"> 6. MOUNTING NUT 7. TAMPERPROOF MOUNTING & LOCKING SCREWS
No. 10-32 x 3/4" (19mm) 8. HANGER BRACKET- 18 GAUGE STEEL 9. INSTALLATION SCREW-FURNISHED BY INSTALLER |
|---|--|

SPECIFICATION

Inter-Lok Stainless Steel Framed Mirror shall have frame fabricated of alloy 18-8 stainless steel, type 304, 16 gauge; vertical edges shall be 3/4" (19mm) radius rounded. Structural reinforcement gussets shall be of welded construction. Mirror glazing shall N^o 1 quality 1/4" (6mm) thick plate glass and shall be warranted for 15 years against silver spoilage. All edges of mirror shall be protected with friction and chafe absorbing fillers. Back of mirror shall be protected by full size shock absorbing water resistant filler and full size one piece 20 gauge corrosion resistant steel. Two (2) 18 gauge steel brackets shall be supplied with mounting holes. Mirror shall be secured to vertical brackets with locking screws. All exposed surfaces shall have a N^o 4 satin finish and shall be protected during shipment with PVC film easily removable after installation.

Inter-Lok Stainless Steel Framed Mirror shall be Model N^o 9600- as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701- 4913

INSTALLATION

Install brackets level and plumb per diagram location using installation screws by others. Hang mirror on brackets and tighten locking screws at top & bottom. For 20" (508mm) and 24" (610mm) high mirrors, bottom edge of mirror frame can be located 48" (1219mm) above finished floor. For compliance with ADA Accessibility Guidelines bottom edge of reflecting surface should be no higher than 40" (1016mm) above finished floor.

MATERIALS

Frame: Alloy 18-8, type 304, 16 gauge (.06 in. <1.5mm> thick) stainless steel. Unitized all welded construction. Exposed surfaces have satin finish. Edges and corners are burr free.

Glass: N^o 1 quality 1/4" (6mm) thick plate/float, silver coated and hermetically sealed with a uniform coating of electrolytic copper plating, warranted against silver spoilage for 15 years. Mirrors meet Federal Spec DD-M-411C, ASTM-C-1036 -91.

Filler: Expanded polyethylene microcell foam sheet material, abrasion resistant and shock absorbing, water resistant, 1/8" (.32mm) total layer thickness.

GLAZING OPTIONS

Units are supplied with 1/4" thick plate glass mirrors as designated by the -A suffix standard. Other glazing options are available. For a complete description see the **MIRROR GLAZING OPTIONS** chart.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.