




**AMERICAN SPECIALTIES, INC.**  
 441 Saw Mill River Road, Yonkers, NY 10701  
 (914) 476.9000 • (914) 476.0688  
 www.americanspecialties.com

<b>MODEL №:</b>	<b>0340</b>
ISSUED:	11-98
REVISED:	21 OCT 2016

## SURFACE MOUNTED LIQUID AND ANTISEPTIC SOAP DISPENSER

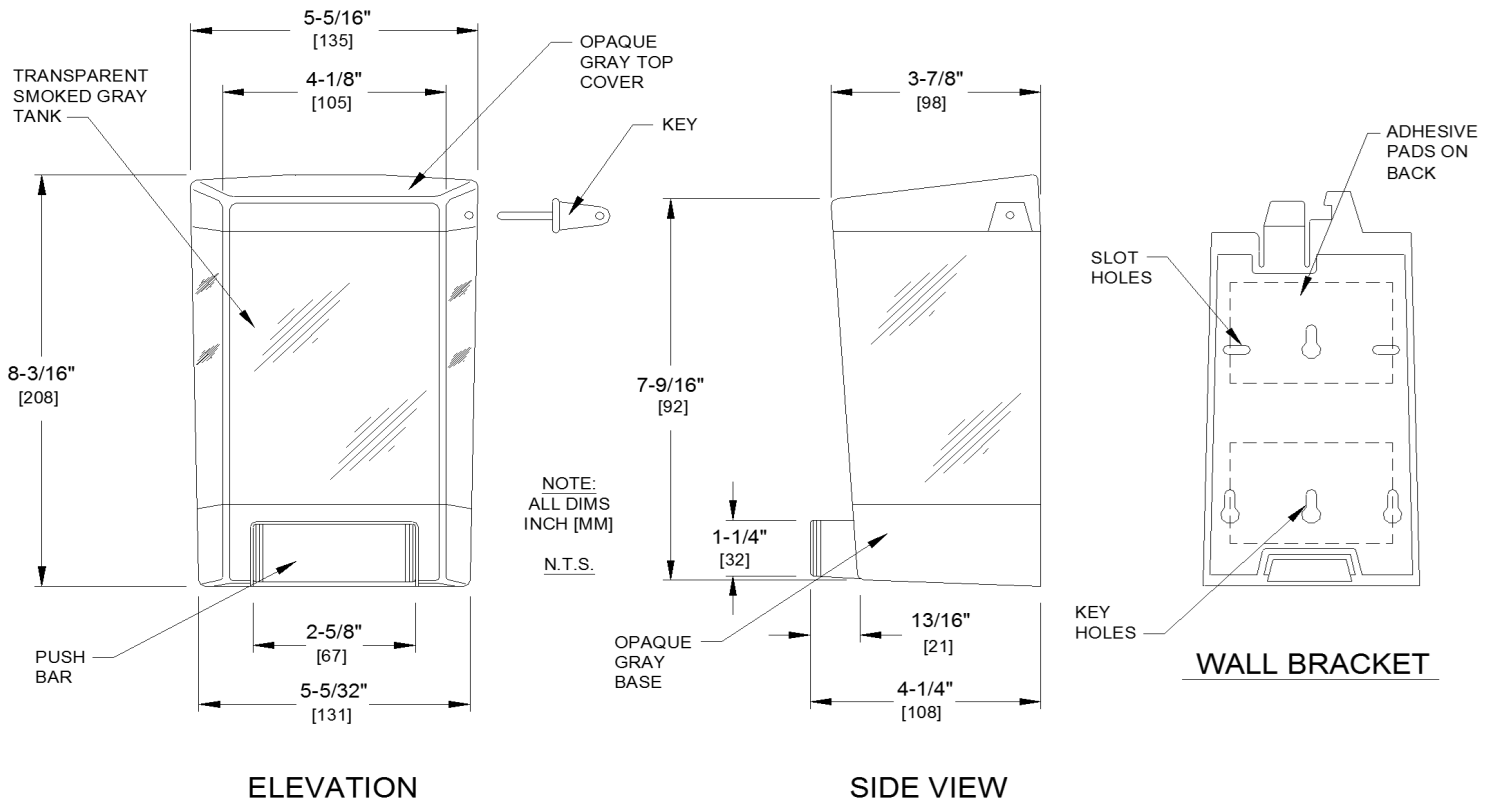

### SPECIFICATION

Surface Mounted Liquid and Antiseptic Soap Dispenser shall hold and dispense up to 46 oz. (1.36 L) of a wide variety of antiseptic and liquid soaps, shampoos, lotions or detergents within the viscosity range of 100-3500 cP (mPa·s) and pH in the range of 5.5-8.5. Unit shall not dispense liquid material containing abrasives such as pumice. Dispenser shall be fabricated of impact resistant ABS plastic with transparent smoked gray tank and opaque gray base, push bar and cover. Valve shall be constructed of concealed plastic body with stainless steel and plastic internal parts. Valve operation shall comply with 2010 ADA Accessibility Standards by requiring no more than 5 lbs<sub>f</sub> (22.2 N) pressure to actuate and require no grasping or twisting by operator. Unit cover shall be sloped and shall overlap edges to prevent top use as a shelf and to keep water spray out. Cover shall be retained by a concealed locking release.

**Surface Mounted Liquid and Antiseptic Soap Dispenser shall be Model № 0340 of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913**

### INSTALLATION

Unit is surface mounted to wall or partition by means of a bracket with two strips of adhesive tape (supplied) or mounting hardware (by others). Unit is secured to concealed bracket and locked in place by concealed snap latch. Recommended installation for general utility is for bottom of unit to be mounted at 42" [1066] above finished floor or 6" [152] minimum above wash basin.

### OPERATION

Soap is manually dispensed by depressing push bar. Unit is reloaded through tamper resistant top cover. Soap tank will continue to feed properly until empty. Tank supply is replenished manually on cycle determined by maintenance needs. Clear tank provides continuous view of soap level.