


# Model #0356

**Technical Data Sheet** 

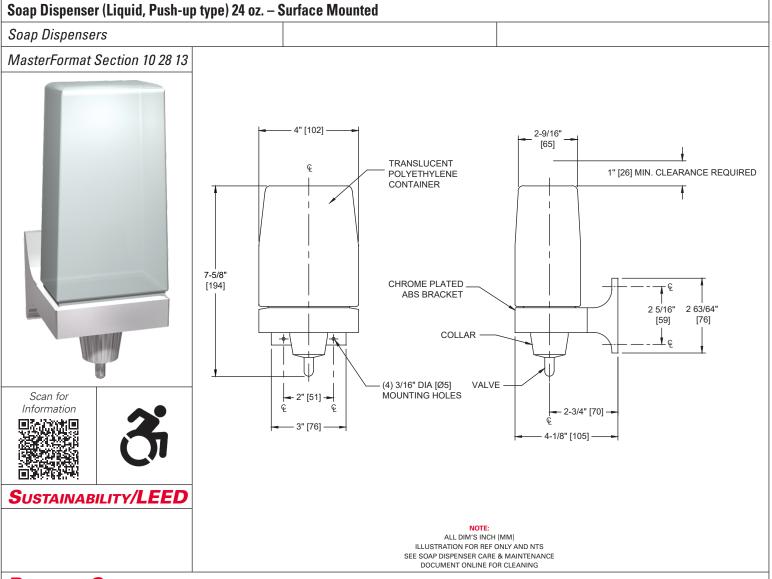

## **PRODUCT OVERVIEW**

Chrome plated ABS mounting bracket with translucent polyethylene soap container. Corrosion resistant ABS valve with stainless steel spring dispenses soaps, detergents or thin lotions. Capacity of 24 oz (0.71 L). Soap Requirements: Proper usage of this dispenser requires, that only soap within the following range for viscosity and pH may be used. Viscosity Range (mPaes or cP): 150 – 3000. pH Range: 5.0 ~ 9.0. Soaps containing reportable salts, chlorides and alcohols should be avoided.

## **Key Features & Specifications**

- Corrosion resistant ABS valve with stainless steel spring
- Chrome plated ABS mounting bracket with translucent polyethylene soap container
- Surface Mounted
- Manual Push-Up Dispenser •
- Liquid Soap 24 oz. (0.71 L) Capacity •

Saw Mill River Road, Yonkers, NY 10701 American Specialties, Inc. 441 (914) 476-9000 www.americanspecialties.com **Revision: R2** Issued: 11/1/2021 Revised: 10/25/2023

Model:#0356

Page: 1 of 2

American Specialties, Inc.

## Model #0356

**Technical Data Sheet** 

**O**PERATION **& M**AINTENANCE

A measured amount of soap is manually dispensed by pushing-up against valve. Unit can be reloaded by unscrewing collar at base and removing soap container. Soap will continue to feed properly until empty. Tank supply is replenished manually on cycle determined by maintenance needs.

| IECHNICAL INFORMATION / PRODUCT PROPERTIES |       |  |
|--|-------|--|
| Property                                   | Value |  |
|  |       |  |

| Dimensions   | 4" x 7-5/8" x 4-1/8" [102 x 194 x 105]                         |
|--------------|--|
| Construction | Chrome Plated ABS with translucent polyethylene soap container |
| Mounting     | Surface Mounted  |
| Options      | N/A  |

#### INSTALLATION

Secure unit bracket to wall or partition using four (4) #10 pan head self-threading screws (supplied). Container is secured to bracket with a threaded collar. For compliance with 2010 ADA Accessibility Standards install unit so that bottom of unit is 48" [1219] maximum Above Finished Floor (AFF). For general utility install unit 42" [1066] AFF or 8" [203] minimum above counter top.

### WARRANTY

One (1) Year from date of Invoice

American Specialties, Inc.441 Saw Mill River Road, Yonkers, NY 10701(914)476-9000www.americanspecialties.comModel:#0356Revision: R2Issued: 11/1/2021Revised: 10/25/2023

Manufacturer reserves the right to make changes to the design, dimensions or functionality of the product without formal notice.