

All Purpose Cabinet (Concealed Body for mounting behind mirrors) – Shelves and Towel Dispenser – Recessed

Cabinets Traditional

MasterFormat Section 10 28 13








Sustainability/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1) MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

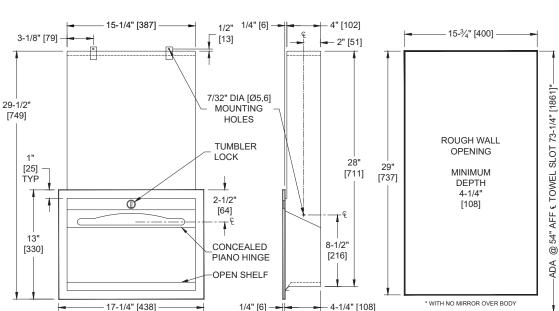

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

For mounting behind continuous mirror. Shelf and Paper Towel Dispenser dispenses 600 C-fold or 800 multi-fold paper towels. Towels are self-feeding until supply is depleted. Unit may be reloaded easily by opening door with a partial load in-place and will continue to feed properly. Cabinet, door, dispenser tank and frame shall be fabricated of 22 gauge alloy 18-8 type 304 stainless steel.

KEY FEATURES & SPECIFICATIONS

- Concealed Body for mounting behind mirrors
- Towel slot has a fully hemmed edge for snag-free dispensing and user safety
- Type 304 Stainless Steel Satin Finish
- Recessed
- 600 C-fold OR 800 multi-fold paper towels

American Specialties, Inc. | 441 Saw Mill River Road, Yonkers, NY 10701 | (914) 476-9000 | www.americanspecialties.com

Model:#0436 Revision: R1 Issued: 11/1/2021 Revised: 3/10/2023

CSI: 10 28 13 Toilet Accessories Page: 1 of 2

Page: 2 of 2



OPERATION & MAINTENANCE

Towels are self-feeding until supply is depleted. Unit may be reloaded easily by opening door with a partial load in-place and will continue to feed properly.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	17-1/4" [430] W x 30-1/2" [775] H x 4-1/4" [108] D
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Recessed
Capacity	600 C-fold OR 800 multi-fold paper towels

INSTALLATION

Unit is recessed mounted in wall using #10 self-threading screws (by others) through concealed mounting holes provided. For compliance with 2010 ADA Accessibility Standards, unit should be installed so that towel dispenser slot is 48" [1219] maximum Above Finished Floor (AFF). Note that bottom of RWO is 3/4" [19] above bottom of unit. If unit is to be installed behind mirror, height is governed by location of bottom edge of reflecting surface. Rough Wall Opening (RWO) required is 15-3/4" [400] W x 29-1/2" [749] H x 4-1/4" [108] D minimum.

Please note: because unit works in conjunction with the installation of a mirror, make sure that face of cabinet sleeve aligns with finished wall. If mirror has hanging strap brackets (ie: model No 0600) take care not to attach into cabinet body.

WARRANTY

One (1) Year from date of Invoice

American Specialties, Inc. | 441 Saw Mill River Road, Yonkers, NY 10701 | (914) 476-9000 | www.americanspecialties.com

Model:#0436 Revision: R1 Issued: 11/1/2021 Revised: 3/10/2023