




AMERICAN SPECIALTIES, INC.
 441 Saw Mill River Road, NY 10701
 (914) 476.9000 • (914) 476.0688
 www.americanspecialties.com

MODEL №: 046926

ISSUED: 06/09

REVISED: 11/11

SEMI-RECESSED ROLL PAPER TOWEL DISPENSER AND WASTE RECEPTACLE CABINET

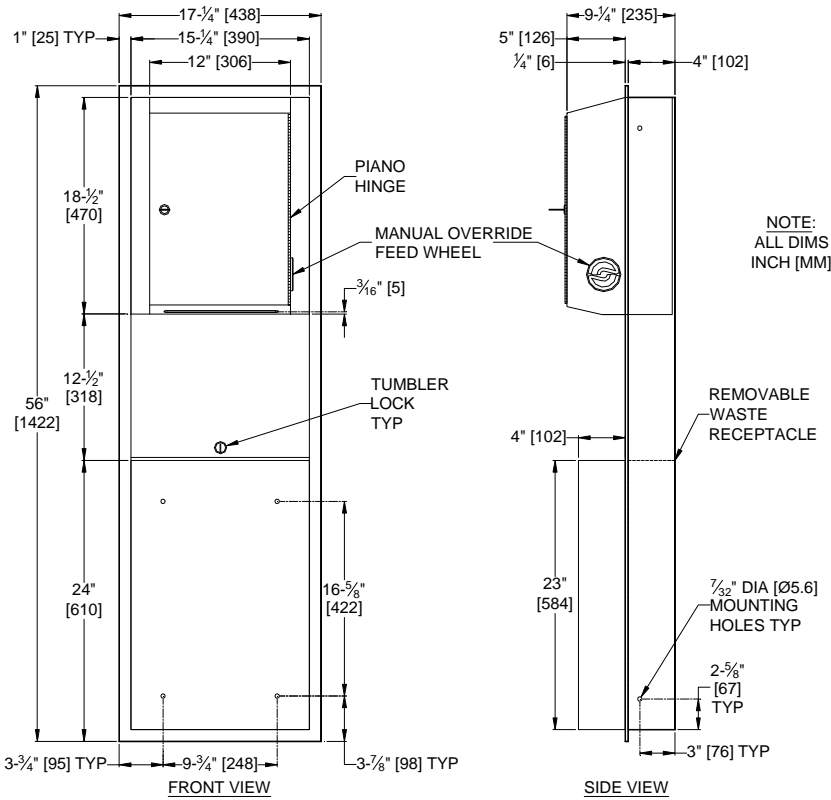

SPECIFICATION

Semi-Recessed Roll Paper Towel Dispenser and Waste Receptacle Cabinet Unit shall hold one towel roll 8" diameter (Ø203) x 8" (203) wide and one stub roll 3" diameter (Ø76) x 8" (203) wide and dispense single full width cut towel 12" (305) long from pull-towel auto-cut dispenser. Dispenser mechanism is supplied installed and automatically changes over from depleted stub roll to start new roll without interruption. Waste receptacle shall have a capacity of 1.83 cu ft (0.052 m³) or 13.5 gal (52 liters). Unit door, frame, waste container and cabinet shall be fabricated of type 304 stainless steel alloy 18-8. Door and back shall be 18 gauge, all other parts shall be 22 gauge. All exposed surfaces shall have satin finish protected by PVC film easily removed after installation. Door shall be attached to cabinet at side with a full-length 3/16" diameter (Ø4.8) stainless steel multi-staked piano hinge and be held closed with a tumbler lock keyed alike to other ASI washroom equipment. Waste container shall have hemmed edges for safety and shall be retained by a tumbler lock keyed alike to other ASI washroom equipment. Face trim shall be 1" (25.4) wide formed from one piece with no miters, welding or open seams and have 1/4" (6.4) square return to wall. Structural assembly of all components shall be of welded construction. Cabinet shall have no exposed fastening devices or spot-welded seams. Labeling is provided to indicate correct operation.

Semi-Recessed Roll Paper Towel Dispenser Cabinet and Waste Receptacle shall be Model № 046926 as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

Install unit in wall recess using four (4) № 10 self-tapping screws (by others) through concealed mounting holes provided. Roll towel mechanism is furnished installed. For ADAAG compliance install unit so that top of side actuating control is 48" (1219) maximum above finished floor (MAX AFF). Note that top of Rough Wall Opening (RWO) is 3/4" (19) below top of unit.

RWO: 15-3/4" W x 54-1/2" H x 4" D minimum (400 x 1384 x 102)

OPERATION

User grasps leading edge of towel and pulls it out of unit until cycle reaches auto-cut position while supply is not depleted. Next towel is automatically presented ready for use by next user after current cut-off cycle is completed. Towels are loaded by opening cabinet door to access dispenser mechanism and by following instructions provided. Waste container is emptied manually on cycle determined by maintenance needs. Locked compartment and receptacle retainer prevents unauthorized access or removal.