


Fixed Tilt Mirror - Variable Sizes

Mirrors

MasterFormat Section 10 28 13

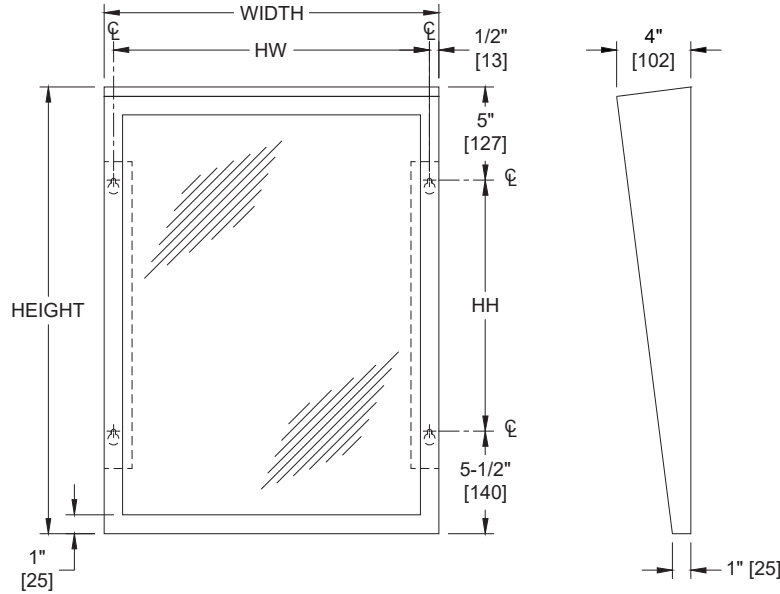

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Offers visibility for wheelchair patients. Frame fabricated of 20 gauge stainless steel with a satin finish. Mirror is tapered from 4" [102] at top to 1" [25] at bottom.

KEY FEATURES & SPECIFICATIONS

- Fixed Tilt Angle offers visibility for wheelchair patients
- Type 304, alloy 18-8 stainless steel - Satin Finish Frame
- Plate Glass Mirror supplied standard unless otherwise specified
- Surface Mounted
- Frame sides shall be aligned straight and be spot welded on surfaces with exposed seams
- Various sizes and glazing options available

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	Various sizes (See Size Options Data below)
Construction	Type 304, alloy 18-8 stainless steel - Satin Finish Frame Corners are folded and spot welded onto support tabs
Mounting	Surface Mounted
Materials	<p>Frame: 18-8, type 304, 20 gauge stainless steel. Unitized all welded construction. Exposed surfaces have satin finish. Edges and corners are burr free.</p> <p>Glass: Standard glazing is #1 quality, 1/4" [6.4] thick plate/float, silver coated and hermetically sealed with a uniform coating of electrolytic copper plating, warranted against silver spoilage for 15 years. Mirrors meet Federal Spec. DD-M-411C, ASTM C-1503, and ASTM C-1036-91. Other glazing types available; see Glazing Options below.</p> <p>Mirror Cushions: Expanded polyethylene microcell foam sheet material, abrasion resistant and shock absorbing, water resistant, 1/8" [3.2] total layer thickness.</p>

INSTALLATION

Unit is surface mounted on wall or partition using four (4) #10 [M5] Pan Head self-threading screws (by others). Mounting holes through back are "keyhole" slots for hanging unit on pre-installed screws. Unit requires 5/8" [16] clearance at top to engage screws in keyhole slots. Concealed Spring Tabs lock mounting flanges onto screws when properly installed to prevent lift off and removal. For compliance with 2010 ADA Accessibility Standards and 2015 ABA Standards, bottom of reflecting surface should be installed 40" [1016] maximum Above Finished Floor.

SIZE OPTIONS

Framed Mirror Sizes	0535-1630 - 16" [406] wide x 30" [762] high 0535-1830 - 18" [457] wide x 30" [762] high 0535-2430 - 24" [610] wide x 30" [762] high	0535-1824 - 18" [457] wide x 24" [610] high 0535-1836 - 18" [457] wide x 36" [914] high 0535-2436 - 24" [610] wide x 36" [914] high
HW & HH Sizes	0535-1630 - 15" [381] HW x 19-1/2" [495] HH 0535-1830 - 17" [432] HW x 19-1/2" [495] HH 0535-2430 - 23" [584] HW x 19-1/2" [495] HH	0535-1824 - 17" [432] HW x 13-1/2" [343] HH 0535-1836 - 17" [432] HW x 25-1/2" [648] HH 0535-2436 - 23" [584] HW x 25-1/2" [648] HH

GLAZING OPTIONS

(A) Plate Glass - 1/4" [6.4] #1 quality polished, silver coated and hermetically sealed with an electrolytic copper plating. Mirrors meet Federal Spec. No. DD-M-411C, ASTM C-1503 and ASTM-C-1036-91. Image quality: Excellent

(B) Tempered Glass - 1/4" [6.4] thick polished tempered glass with two coats of silver. Hermetically sealed with an electrolytic copper plating. Back of mirror is finished and protected with a heavy waterproof paint. Glazing meets Federal Specification No. DD-G1403B, Amendment 1, ASTM C-1503 and ASTM-C-1048-92. Image quality: Good

(C) Metal Mirrors - Type 304 alloy 18-8 stainless steel, 20 gauge polished to a #8 mirror finish. Image quality: Good

(D) Lexan Dura-Mirror - 1/4" [6.4] impact resistant polycarbonate sheet. Mirror face is provided with removable masking to prevent scratching during installation. Image quality: Very Good

(E) Plexiglas® - 1/4" [6.4] thick acrylic plastic, lightweight and highly shock resistant. Image quality: Very Good

(L) Mirror is fabricated with a 1/32" [0.8] thick vinyl interlayer bonded between two 1/8" [3] sheets of #1 quality polished plate glass with back silver. Hermetically sealed with a uniform coating of electrolytic copper plating. Back of mirror is finished and protected with a heavy-duty waterproof paint. Laminated glass meets the performance criteria of Federal Spec. No. DD-M-451 and ANSI Z87.1 and complies with CPSC standards 16 CFR 1201 (1) 11. Image quality: Excellent

WARRANTY

Warranted against silver spoilage for 15 years from date of Invoice