



**AMERICAN SPECIALTIES, INC.**


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 0952-B

ISSUED: 1-87

REVISED: 9-04

**RECESS MOUNTED MEDICINE CABINET WITH MIRROR SWING-DOOR**

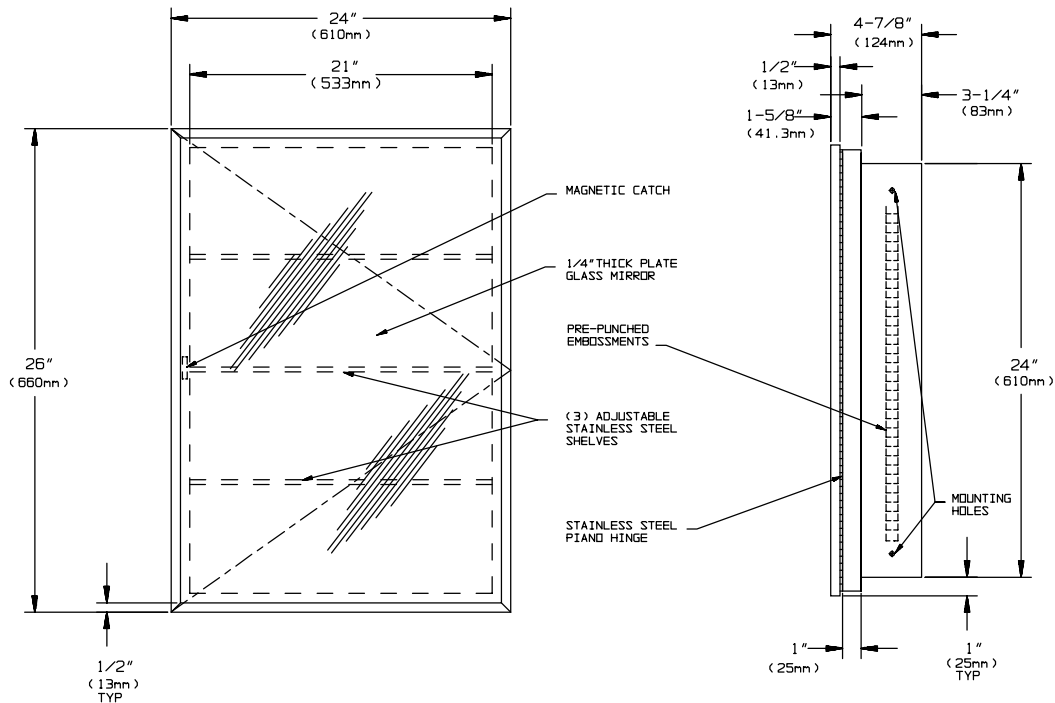

**SPECIFICATION**

Recess Mounted Medicine Cabinet with Mirror Swing-Door shall have door channel frame and cabinet fabricated of type 304, 18-8 alloy stainless steel, 22 gauge. All exposed surfaces shall be N<sup>o</sup> 4 satin finish and be protected during shipment with a PVC film easily removable after installation. Interior face trim shall be of one-piece construction with hairline miters and no exposed fasteners or welding seams. Mirror shall be 1/4" (6.35mm) thick N<sup>o</sup> 1 quality polished float/plate glass with hermetically-sealed, electrolytically-applied copper and silver coatings and shall have a warranty against silver spoilage of fifteen (15) years. Door channel-frame shall be attached to cabinet with a full-length, heavy-duty 3/16" dia. stainless steel multi-staked piano hinge and shall be held closed with a magnetic catch and shall be prevented from over-swing by the self limiting 90° construction of the door and hinge. Structural assembly of cabinet and door components shall be of welded construction. Cabinet interior shall receive (3) adjustable stainless steel shelves as provided.

Recess Mounted Medicine Cabinet with Mirror Swing-Door shall be Model N<sup>o</sup> 0952-B as manufactured by American Specialties, Inc., Yonkers, NY 10701-4913

**INSTALLATION**

Unit is mounted in wall recess using four (4) N<sup>o</sup> 10 self tapping screws (by others) through concealed mounting holes provided in cabinet sides. For maximum usability typical mounting height is 46" (1168mm) from bottom of mirror door above finished floor (AFF) or 12" (305mm) above lavatory counter top. For compliance with ADA Accessibility Guidelines, unit should be installed so that bottom edge of reflecting surface is no higher than 40" (102mm) maximum (AFF). Note that bottom edge of door is 3/4" (19mm) below RWO.

**Rough Wall Opening (RWO) required is..... 21-3/4"W x 24-1/2"H x 3-1/2"D (552mm x 622mm x 89mm).**

**OPERATION**

User pulls door to access contents and manually pushes door shut. Shelf spacing may be adjusted using internally embossed clip in slots.

**OPTIONS AVAILABLE**

Cabinet can be inverted to change left hand swing (shown) to right hand swing as required at installation site.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.