
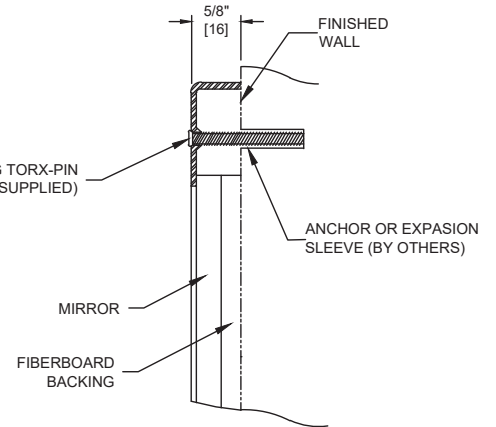


Mirror – 20 Ga. #8 Mirror Polished Stainless Steel, Front Mount 12" x 16"

Security Accessories

MasterFormat Section 10 28 13

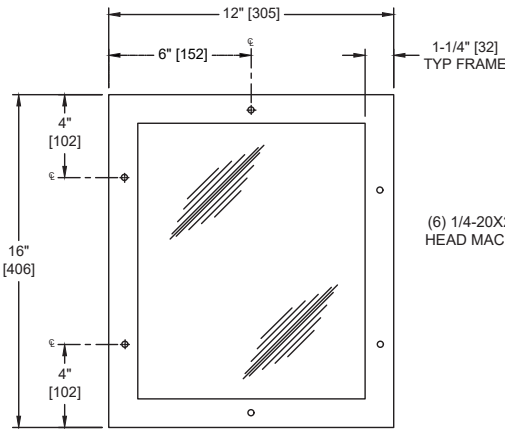

(6) 1/4-20X2" [M6X50] LONG TORX-PIN HEAD MACHINE SCREWS (SUPPLIED)

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Unit consists of wall mounting plate fabricated of 7 gauge type 304, alloy 18-8 stainless steel with four countersunk mounting holes and eight tapped holes. Formed mirror fabricated of 20 gauge type 304, alloy 18-8 stainless steel with #8 mirror polish finish provided with eight dimpled holes through integral frame and 1/4-20 x 1/4" Torx® head screws for securing to wall mounting plate. 20 gauge, #8 mirror polish finish.

KEY FEATURES & SPECIFICATIONS

- Security Framed Mirror with Rounded corners
- Frame - Type 304, alloy 18-8 stainless steel - Satin Finish
- Front Mount
- Options for reflective surface - Polished Stainless Steel, Tempered Glass or Plexiglass

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	10-1/16" [256] W x 11-9/16" [294] H x 7/16" [11] D
Construction	Type 304, alloy 18-8 stainless steel with #8 Polish One piece formed - 20 gauge with 7 gauge Wall Anchor Plate
Mounting	Front Mount
Materials	<u>Frame:</u> 18-8, type 304, 14 gauge stainless steel. Unitized all welded construction. Corners mitered, welded and polished. Exposed surfaces have satin finish. Edges and corners are burr free.

INSTALLATION

For Compliance with 2010 ADA Accessibility Standards and 2015 ABA Standards, install unit so that bottom edge of reflecting surface is 40" [1016] maximum Above Finished Floor (AFF). Surface mount wall anchor plate with four (4) screws (supplied) through countersunk mounting holes provided. Mount and secure framed mirror to wall anchor plate with eight (8) 1/4" - 20 x 3/8" long pin-Torx® flat head machine screws (supplied) through dimpled holes in frame into tapped holes provided in wall plate.

SIZE OPTIONS

Option 20 ga #8 mirror polish finish

GLAZING OPTIONS

- (-13) Tempered Glass - 1/4" [6.4] thick polished tempered glass with two coats of silver. Hermetically sealed with an electrolytic copper plating. Back of mirror is finished and protected with a heavy waterproof paint. Glazing meets Federal Specification No. DD-G1403B, Amendment 1, ASTM C-1503 and ASTM-C-1048-92. Image quality: Good
- (-14) Metal Mirrors - Type 304 alloy 18-8 stainless steel, 20 gauge polished to a #8 mirror finish. Image quality: Good
- (-17) Plexiglas® - 1/4" [6.4] thick acrylic plastic, lightweight and highly shock resistant. Image quality: Very Good

WARRANTY

One (1) Year from date of Invoice