




**AMERICAN SPECIALTIES, INC.**  
 441 Saw Mill River Road, Yonkers, NY 10701  
 (914) 476.9000 • (914) 476.0688  
 www.americanspecialties.com

**MODEL №:** 128-1


**ISSUED:** JAN 1987

**REVISED:** 14 JAN 2022

**FRONT MOUNTED BOOKSHELF WITH FOUR (4) SECURITY SAFETY CLOTHES HOOKS**

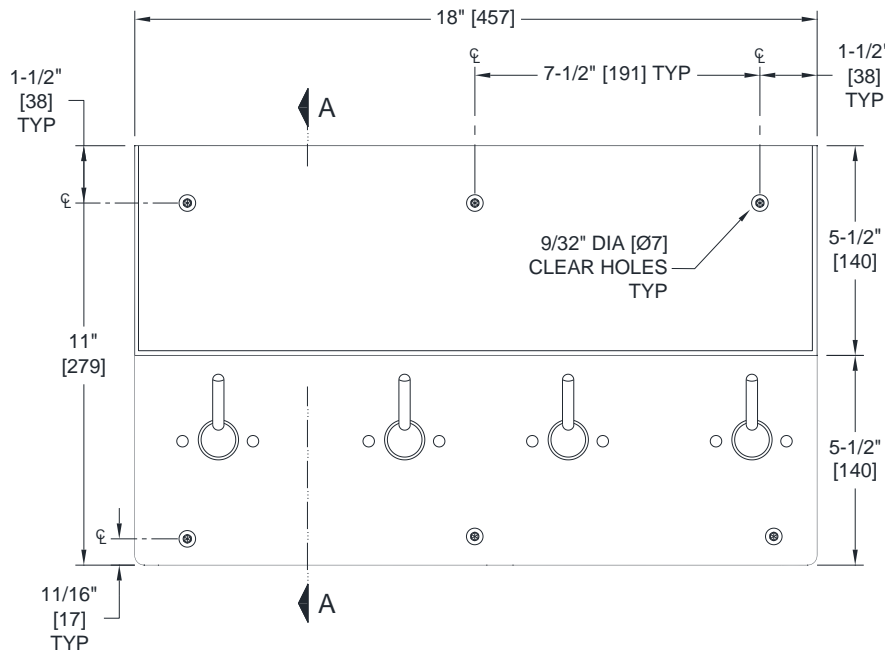

**ELEVATION**

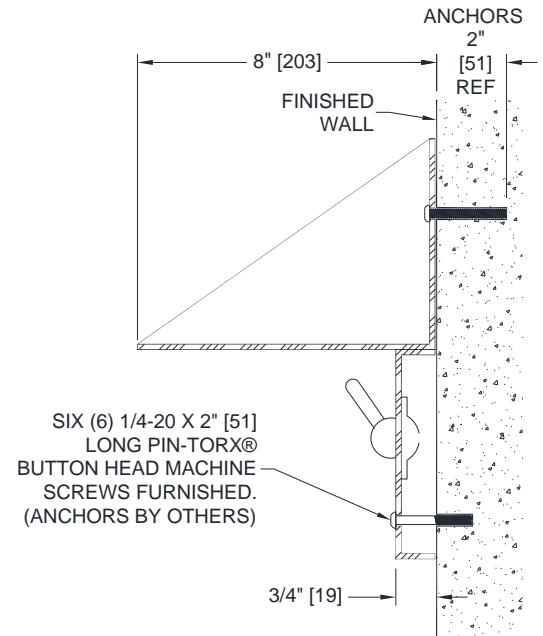

**SECTION "A-A"**

**NOTE**

ALL DIM'S INCH [MM]

ILLUSTRATION FOR REF ONLY AND NTS

**SPECIFICATION**

Bookshelf with four (4) Security Safety Clothes Hooks for surface mounting shall be type 304 stainless steel alloy 18-8. Back plate and bookshelf shall be 14 gauge. Clothes hooks shall be solid bar 3/8" Dia [Ø10] of one-piece construction with 1" Dia [Ø25] swivel trip-ball. Safety hook shall snap down when load exceeds 35 lb (16 kg) limit. Trip-ball socket housing shall prevent hook from being set in vertical up position. All exposed surfaces except shelf interior shall have satin finish. All seams shall be welded and ground smooth. The unit is provided with six (6) clear mounting holes that shall accept (supplied) 1/4"-20 X 2" or [M6 X 50] stainless steel pin-Torx® button head machine screws.

**Front Mounted Bookshelf with four (4) Security Safety Clothes Hooks shall be Model № 128-1 of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, NY 10701-4913**

**INSTALLATION**

For compliance with 2010 ADA Accessibility Standards install unit so that shelf is no more than 48" [1219] Maximum Above Finished Floor. Surface mount unit on finished wall with six (6) 1/4"-20 x 2" long [M6 X 50] pin-Torx® button head machine screws (provided) into wall anchors (by others) through front mounting holes (provided).

**OPERATION**

An 18" W [457] x 8" D [203] bookshelf is provided with triangular sidewalls to function as bookends. Clothes hooks are tensioned to release down when overloaded beyond the 35 lb (16 kg) limit.