American Specialties, Inc.

Technical Data Sheet

Simplicity Collection Paper Towel Dispenser (475 Multi - 350 C-Fold) & Waste Receptacle – Matte Black Powder Coated –

Paper Towel Combination Units

Simplicity

MasterFormat Section 10 28 13



Scan for Information






Sustainability/LEED

MR 4.1 (1) EQ 4.1 (1) MR 4.2 (1) EQ 4.2 (1)

MR 6 (1) EQ 4.4 (1)

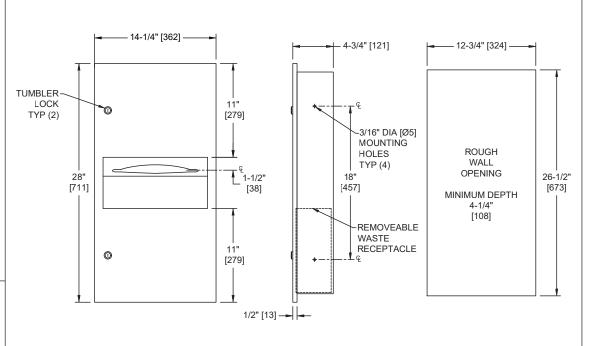

NOTE:

ALL DIM'S INCH [MM]

ILLUSTRATION FOR REF ONLY AND NTS

FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN

PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Well-suited for the smaller washroom with less space and traffic, this unit dispenses 350 C-fold or 475 multi-fold paper towels. Includes 2.2 gal. (8.4 L) stainless steel waste receptacle. Door held closed with tumbler lock. Exposed surfaces are Matte Black Powder Coated. Towels are self feeding until supply is depleted. Unit will continue to feed properly when reloaded with a partial load in place. Locked door prevents unauthorized access or removal.

KEY FEATURES & SPECIFICATIONS

- Seamless construction, crisp lines and minimalistic design
- Concealed multi-staked hinge 3/16" diameter [Ø5]
- Type 304 Stainless Steel Matte Black Powder Coated
- Recessed
- 350 C-Fold or 475 Multi-Fold / 2.2 Gal. (8.4 L) Waste Capacity

American Specialties, Inc. | 441 Saw Mill River Road, Yonkers, NY 10701 | (914) 476-9000 | www.americanspecialties.com

Model:#64623-41PC Revision: R1 Issued: 11/1/2021 Revised: 3/10/2023

OPERATION & MAINTENANCE

Towels are self feeding until supply is depleted. Unit will continue to feed properly when reloaded with a partial load in place. Waste receptacle is emptied manually on a cycle determined by maintenance needs. Locked door prevents unauthorized access or removal.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	14-1/4" [362] W x 28" [711] H x 4-3/4" [121] D
Construction	Type 304 Stainless Steel - Matte Black Powder Coated
Mounting	Recessed
Capacity	350 C-Fold or 475 Multi-Fold / 2.2 Gal. (8.4 L) Waste Capacity

INSTALLATION

Mount unit in wall recess with #10 self-threading screws (by others) through concealed mounting holes provided. Note that top of Rough Wall Opening is 3/4" [19] below top of unit.

Rough Wall Opening (RWO) required is 12-3/4" [324] W X 26-1/2" [673] H X 4-1/4" [108] D minimum

WARRANTY

One (1) Year from date of Invoice

American Specialties, Inc. | 441 Saw Mill River Road, Yonkers, NY 10701 | (914) 476-9000 | www.americanspecialties.com

Model:#64623-41PC Revision: R1 Issued: 11/1/2021 Revised: 3/10/2023