Simplicity Collection Paper Towel Dispenser & Waste Receptacle – Matte Black Powder Coated – Surface Mounted

Paper Towel Combination Units | *Simplicity*


MasterFormat Section 10 28 13



Scan for Information

SUSTAINABILITY/LEED

MR 4.1 (1) EQ 4.1 (1)
MR 4.2 (1) EQ 4.2 (1)
MR 6 (1) EQ 4.4 (1)

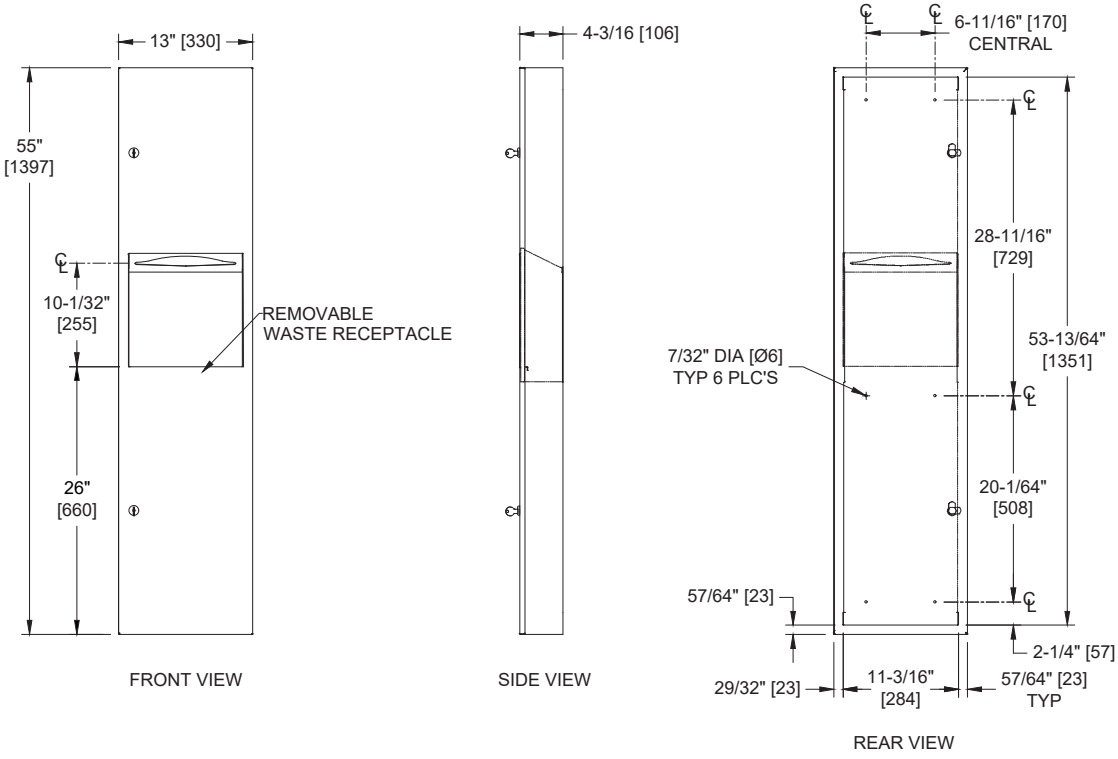

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Dispenses 600 C-fold or 800 multi-fold paper towels. 4.2 gal. (16 L) stainless steel waste receptacle. Door held closed with two (2) tumbler locks. Waste receptacle has a rolled edge finger hole for easy servicing. Surface mounted with stainless steel collar. Paper towels are manually withdrawn through dispensing slot. Unit will continue to feed properly when reloaded with a partial load in place. Refill dispenser by unlocking door and replacing towels for an empty or partially empty unit. Locking full-face door over compartments prevents unauthorized access or removal.

KEY FEATURES & SPECIFICATIONS

- Seamless construction, crisp lines and minimalistic design
- Concealed multi-staked hinge - 3/16" diameter [Ø5]
- Type 304 Stainless Steel - Matte Black Powder Coated
- Door 18 gauge, Cabinet 20 gauge
- Surface Mounted - w/ -9 Collar
- 600 C-Fold or 800 Multi-Fold / 4.2 Gal. (16.0 L) Waste Capacity

Operation & Maintenance

Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly. Waste receptacle is emptied manually on a cycle determined by maintenance needs. Locking door prevents unauthorized access or removal. Two (2) tumbler locks.

Technical Information / Product Properties

Property	Value
Dimensions	13" [330] W x 55" [1397] H x 4-3/16" [106] D
Construction	Type 304 Stainless Steel - Matte Black Powder Coated Concealed multi-staked hinge - 3/16" diameter [Ø5]
Mounting	Surface Mounted - w/ -9 Collar
Capacity	600 C-Fold or 800 Multi-Fold / 4.2 Gal. (16.0 L) Waste Capacity

Installation

Surface mount and secure unit to wall with four (4) #10 self-threading screws (by others) through mounting holes in cabinet back. For compliance with 2010 ADA Accessibility Standards mount unit with centerline of towel outlet 48" [1219] maximum Above Finish Floor (AFF). For general utility the unit should be installed with its bottom edge 16-3/4" [425] AFF. SM collar is installed on cabinet prior to mounting on wall following procedure as described on SM Collar Data Sheet.

Warranty

One (1) Year from date of Invoice

Manufacturer reserves the right to make changes to the design, dimensions or functionality of the product without formal notice.