



AMERICAN SPECIALTIES, INC.
 441 Saw Mill River Road, Yonkers, NY 10701
 (914) 476.9000 • (914) 476.0688
 www.americanspecialties.com

MODEL №: 6477-9

ISSUED: 08 AUG 2019

REVISED: 16 MAR 2022

SIMPLICITY™ TOILET SEAT COVER DISPENSER - SURFACE MOUNTED

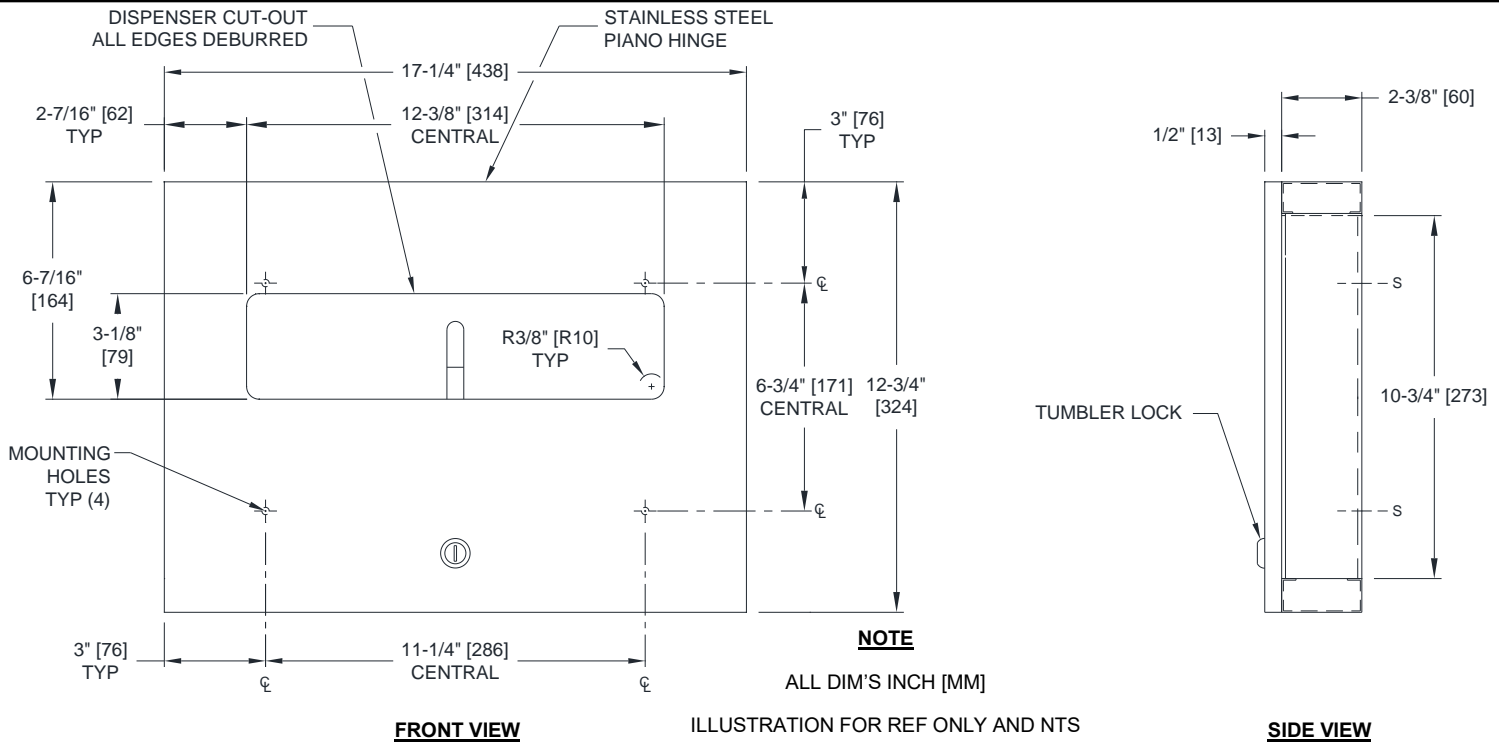


ILLUSTRATION FOR REF ONLY AND NTS
 FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
 PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

SPECIFICATION

Simplicity™ Collection Surface Mounted Toilet Seat Cover Dispenser shall hold and dispense 500 standard single or half-fold paper toilet seat covers contained in supply box and shall have cabinet, frame, SM-collar and door of 22 gage type 304 stainless steel alloy 18-8. Cabinet shall be 20 gage with a 1" [25] wide perimeter return to lay flat against collar. Door shall be 18 gage with 1/2" [13] square return to collar with no open seams visible on door face. Door shall be attached to top of cabinet with a full length 3/16" Dia [Ø4,8] stainless steel multi-staked piano hinge and shall be held closed with a tumbler lock keyed alike to other ASI washroom equipment. All exposed surfaces shall be satin finish and shall be protected during shipment with PVC film easily removable after installation. Cover dispensing slot shall have a fully deburred flat edge for snag -free dispensing and user safety. Structural assembly of cabinet and door components shall be of welded construction and shall have no exposed fasteners or welded seams. SM-Collar shall be supplied loose in same box with 6477 cabinet.

Simplicity™ Collection Surface Mounted Toilet Seat Cover Dispenser shall be Model № 6477-9 as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

Surface mount unit on wall using four (4) № 10 x 1-1/2" [Ø5 x 40] or length as appropriate for site conditions self-threading flat, oval or pan head screws (by others) through concealed holes provided into suitable wall reinforcement (by others) or anchors (by others). Mounting holes are provided in back plate of cabinet and are accessible through door for installation. For compliance with 2010 ADA Accessibility Standards, 2015 ABA Standards and ANSI 117.1 Standards install unit so that top of dispenser slot is 48" [1219] Maximum Above Finished Floor (AFF) if clear floor reach access is provided or 46" [1168] Max AFF if side reach over an obstruction only is provided (ie: vanity).

OPERATION

Covers are self-feeding by manual pull until supply is depleted. Unit is manually reloaded with a full box through access door on schedule determined by maintenance requirements.