
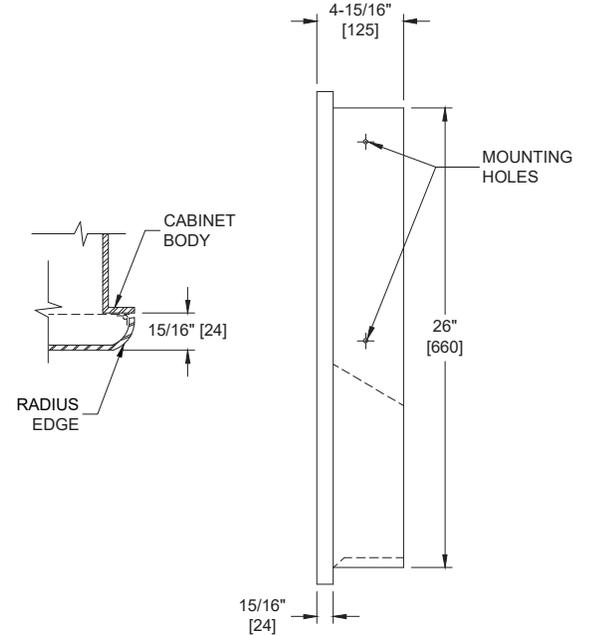


Profile™ Collection Paper Towel Dispenser – Recessed

Paper Towel Dispensers

Profile

MasterFormat Section 10 28 13

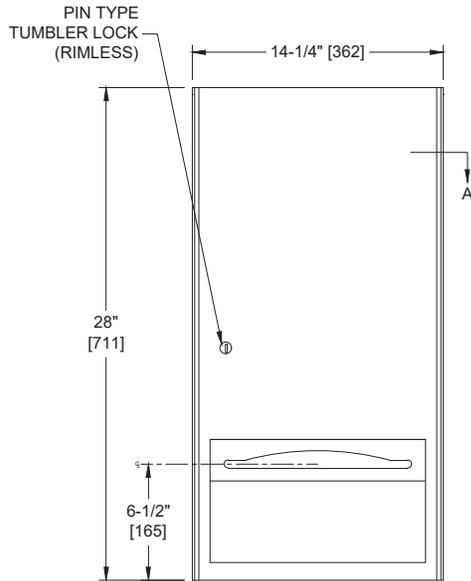

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Dispenses 600 C-fold or 800 multi-fold paper towels. Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly. Door held closed with a rimless tumbler lock.

KEY FEATURES & SPECIFICATIONS

- Robust 16 gauge Stainless Steel face
- Curved (radius) edges add elegance
- Type 304 Stainless Steel - Satin Finish
- Recessed
- 3/16" CONCEALED piano hinge adds durability
- 600 C-Fold OR 800 Multi-Fold

OPERATION & MAINTENANCE

Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	14-1/4" [362] W x 28" [711] H x 4-15/16" [125] D
Construction	Type 304 Stainless Steel - Satin Finish 3/16" CONCEALED piano hinge adds durability
Power	N/A
Operation	Manual
Mounting	Recessed
Capacity	600 C-Fold OR 800 Multi-Fold

INSTALLATION

Mount unit in wall recess using four (4) #10 self-threading screws (by others) through concealed mounting holes provided. For compliance with 2010 ADA Accessibility Standards install unit so that centerline of towel dispenser slot is 48" [1219] maximum above finished floor (AFF). Note that top of RWO is 3/4" [19] below top of unit. Typical suggested mounting height is 42" [1067] AFF to bottom of unit.

Rough Wall Opening (RWO) required is 12-3/4" [324] W x 26-1/2" [673] H x 4-1/4" [108] D minimum

WARRANTY

One (1) Year from date of Invoice