

Mobile Plastic Laminate Sanitizing Station (- A Battery / -AC - AC Power) - Freestanding NEW

Stand



MasterFormat Section 10 28 13



Scan for
Information



SUSTAINABILITY/LEED

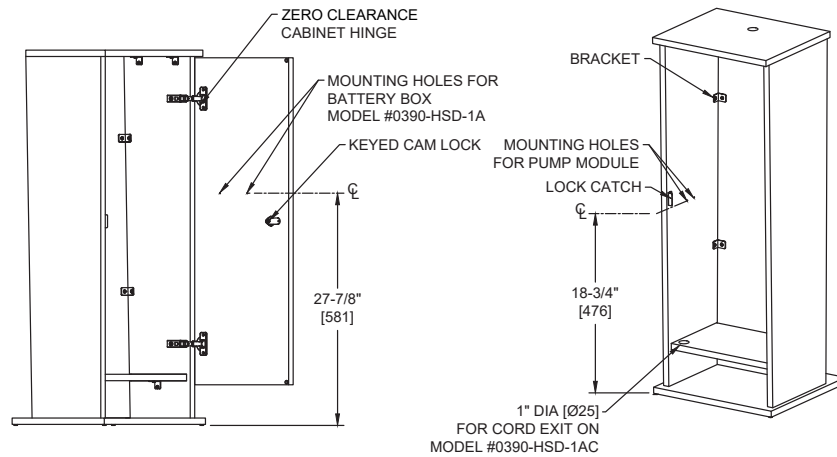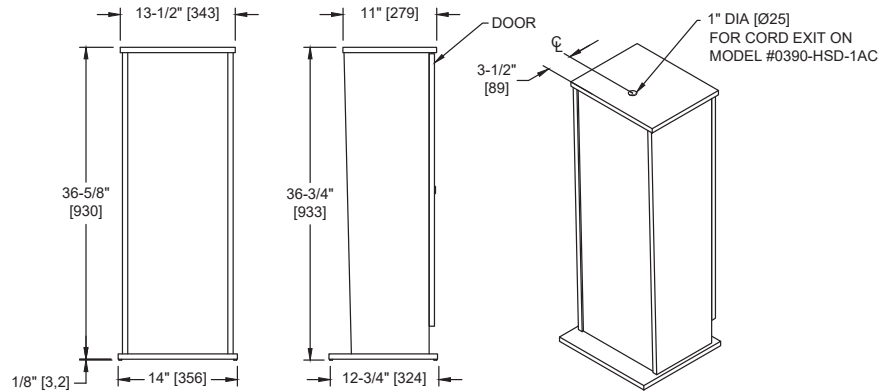

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Freestanding Plastic Laminate Sanitizer Station shall be constructed with panels made of antimicrobial plastic laminate bonded with non-toxic adhesive to particle board core and shall be 5/8" [16] thick. The Plastic laminate color shall be Cosmic Strandz (see product page on website for reference). Stand shall be freestanding to enable placement by Facility Manager/Owner in any convenient location desired to serve occupant/visitor traffic. Interior of stand is accessible from lockable door on back of stand. Door shall be attached to back of stand with two (2) zero-clearance concealed cabinet hinges and shall be held closed with a keyed, nickel-plated zinc cam lock. Top surface of stand shall have 1" Dia. [Ø25] hole for dispenser spout installation. Side panel inside (RH) shall have mounting holes to accommodate pump module wall bracket and inside face of door shall have mounting holes to accommodate battery box. Brackets shall be used for structural assembly of cabinet panel components and shall be 16 gauge type 304 stainless steel alloy 18-8 with polished finish. The bottom shelf in stand shall have a gap to inside of closed door (see OM&IG for retaining method) for cord to exit cabinet when using the 0390-HSD-1AC unit. Fasteners used on the interior of the cabinet shall be zinc-plated steel. Fasteners used on base shall be stainless steel. Base has silicone rubber feet to prevent sliding. Stand is freestanding for flexibility of placement and repositioning. All edges and corners have 1/16" Radius [1.6] for smooth surface transitions. Unit is shipped assembled.

KEY FEATURES & SPECIFICATIONS

- Tip-resistant design, with skid-resistant silicone tips on the base
- Pre-assembled stand includes gel sanitizer dispenser 0390-HSD (field mounted)
- Stand panels - antimicrobial plastic laminate - 5/8" [16] thick
- Free Standing - Mobile
- Lockable door, provides access to dispenser components
- Dispenser choice - Battery or AC power

OPERATION & MAINTENANCE

Sanitizing Station provides stable, tip and skid resistant location for sanitizer dispenser convenient to visitor and facility occupant traffic flow. Locked Station door prevents unauthorized access or removal of dispenser from the stand. See OM & IG for complete description of features and operations.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	14" [356] W x 36-3/4" [933] H x 12-3/4" [324] D
Construction	Solid high-impact high-density polyethylene (HDPE) Tip-resistant design, with skid-resistant silicone tips on the base
Mounting	Free Standing - Mobile
Capacity	One (1) gel sanitizer dispenser 0390-HSD (Included)

INSTALLATION

Hardware is provided to install dispenser components inside the stand using the pre-drilled mounting holes. Unit should be placed in location to maximize access by pedestrian traffic and not interfere with any accessible route clearances. See OM & IG for complete installation of dispenser units onto and within stand.

WARRANTY

One (1) Year from date of Invoice