



**AMERICAN SPECIALTIES, INC.**


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

**SR-COLLAR**

ISSUED: 1-87

REVISED: 3-99

**SEMI-RECESSED MOUNTING COLLAR**

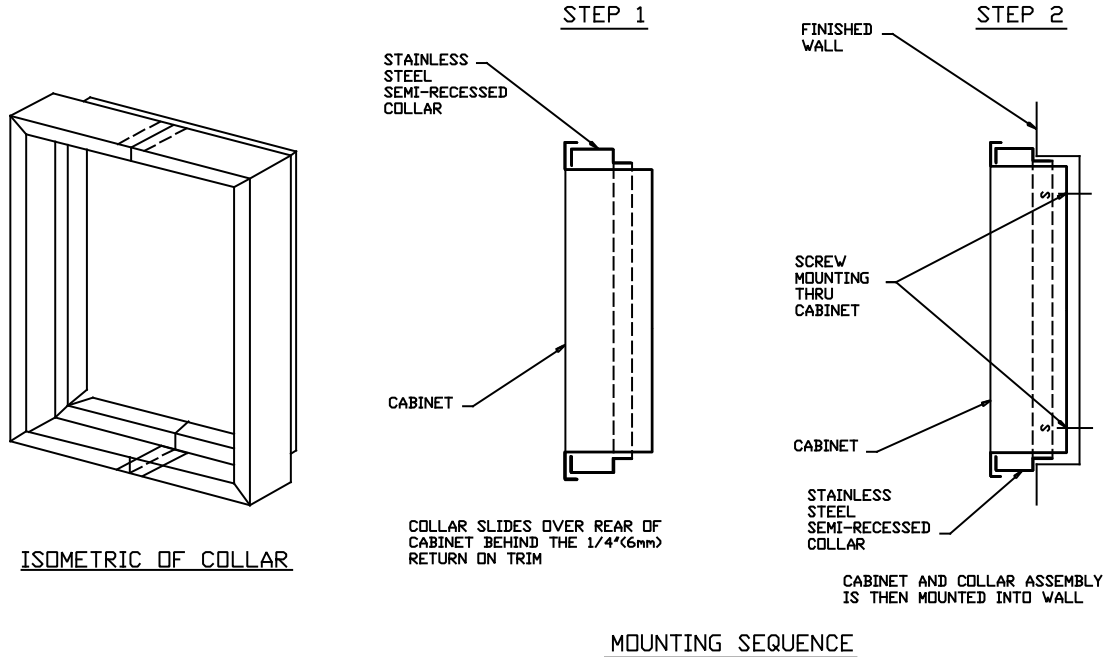

ISOMETRIC OF COLLAR

**SPECIFICATION**

Adapter collar for Semi-Recessed installations shall be fabricated of type 304, 18-8 alloy stainless steel, N<sup>o</sup>22 gauge. All exposed surfaces shall have satin finish. Unit shall be protected for shipment with a PVC film easily removed after installation. Unit shall be sized to fit snugly under the 1/4" (6mm) return of the mating cabinet. There shall be no seams on the vertical sides or the corners of the collar. After installation the collar shall be NON-REMOVABLE.

**Semi-Recessed Mounting Collar shall be (Cabinet Model N<sup>o</sup> followed by suffix) -2, -4, or -6 of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, NY 10701-4913.**

**INSTALLATION**

Collar slides over rear of cabinet and under the 1/4" (6mm) return of the mating cabinet. Assembly of collar and cabinet is then placed into normal RWO. Standard mounting hardware supplied with cabinet is used as normal.

**OPERATION**

Semi-recessed collars conveniently adapt standard recessed mounting cabinets for use in walls with insufficient depth for full recessing. Collar is fabricated to the specific width and height size of the cabinet upon which it is being used. The depth is set to accommodate the difference between available wall depth and the mounting depth of the cabinet being used.

| COLLAR SUFFIX      | DIFFERENCE BETWEEN CABINET DEPTH AND WALL DEPTH (PROTRUSION) |
|--------------------|--|
| -2 (FORMERLY SR-2) | UP TO 2" (0 - 51mm)  |
| -4 (FORMERLY SR-4) | 2" TO 4" (51mm - 102mm)                                      |
| -6 (FORMERLY SR-6) | 4" TO 6" (102mm - 152mm)                                     |