

Single Toilet Tissue Holder – Surface Mounted, Controlled Delivery, Theft-resistant spindle Toilet Tissue Dispensers MasterFormat Section 10 28 13










MR 4.1 (1) MR 6 (1) EQ 4.2 (1) MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

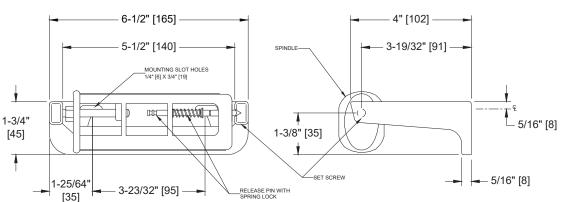

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Single roll toilet tissue dispenser with controlled-delivery spindle that is vandal resistant and locked into place by concealed set screw. Holds and dispenses all standard core roll tissue up to 6" diameter [Ø152]. Fabricated of heavy-duty aluminum casting with satin-matte, silver-grey finish. The "no waste" rocking action spindle shall be fabricated of impact resistant, ABS thermoplastic and be tamper resistant with a concealed release mechanism and locking screw that shall be removable only with a hex key.

KEY FEATURES & SPECIFICATIONS

- Single Roll Dispenser
- Theft Resistant, Controlled Delivery Spindle
- Aluminum Casting with Satin-Matte, Silver-Grey Finish
- Surface Mounted

American Specialties, Inc. | 441 Saw Mill River Road, Yonkers, NY 10701 | (914) 476-9000 | www.americanspecialties.com

Model:#0263-12 Revision: R2 Issued: 11/1/2021 Revised: 5/29/2023

CSI: 10 28 13 Toilet Accessories

Page: 1 of 2



OPERATION & MAINTENANCE

Spindle revolves 1/2 revolution for each operation and then returns to its original position.. Roll core prevents access to release pin and cannot be removed from spindle until exhausted and screw is loosened with key. Unit is replenished by releasing a concealed pin which in turn releases a spring lock mechanism on spindle.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	6-9/16" [167] W x 1-3/4" [44] H x 4-3/4" [120] D
Construction	Aluminum Casting with Satin-Matte, Silver-Grey Finish
Mounting	Surface Mounted
Capacity	Holds one (1) roll of standard core roll toilet paper up to 6" Dia. [Ø152]

INSTALLATION

Unit is surface mounted on wall or partition using #10 self-threading screws (by others). For compliance with 2010 ADA Accessibility Standards, unit should be installed so that tissue roll centerline is between 48" [1219] maximum above finished floor (AFF) and 32" [813] minimum AFF.

OPTIONS

WARRANTY

One (1) Year from date of Invoice

American Specialties, Inc. | 441 Saw Mill River Road, Yonkers, NY 10701 | (914) 476-9000 | www.americanspecialties.com

Model:#0263-12 Revision: R2 Issued: 11/1/2021 Revised: 5/29/2023