EZ FILL™ Stand-Alone Foam Soap Dispenser

Soap Dispensers | *EZ Fill*

MasterFormat Section 10 28 13

Scan for Information

SUSTAINABILITY/LEED

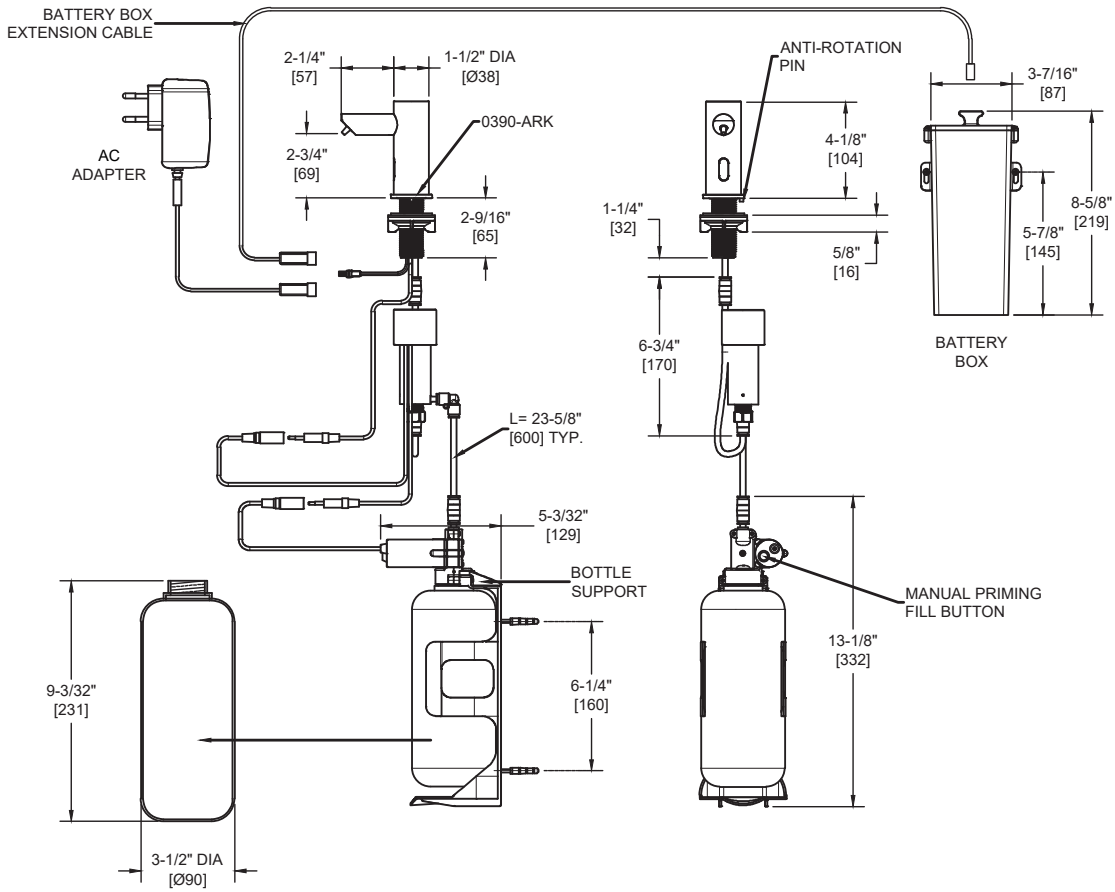

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
SEE SOAP DISPENSER CARE & MAINTENANCE DOCUMENT ONLINE FOR CLEANING

PRODUCT OVERVIEW

EZ FILL™ features heavy-duty brass dispensers with chrome plated finish an anti-rotation flange and is easy to use. Translucent tank holds 33.8 oz (1 L) of liquid foaming soap. Electrically operated using batteries or alternating current. For Matte Black finish, use suffix -41 Model Options available, choose appropriate suffix: 0394-1A – EZ Fill™ – STAND-ALONE FOAM SOAP Dispenser with 1 Liter Bottle – Battery Operated (6 D Cell – not included) 0394-1AC – EZ Fill™ – STAND-ALONE FOAM SOAP Dispenser with 1 Liter Bottle – AC Plug In Version 0394-6-1A – EZ Fill™ – STAND-ALONE FOAM SOAP Dispenser with 1 Liter Bottle (individual) – Battery Operated (6 D Cell – not included) – 6 Pack SKU (comes with Remote Control) 0394-6-1AC – EZ Fill™ – STAND-ALONE FOAM SOAP Dispenser with 1 Liter Bottle (individual) – AC Plug In Version – 6 Pack SKU (comes with Remote Control) 0390 – For MULTI-FEED kit option Soap Requirements: Proper usage of this dispenser requires, that only soap within the following range for viscosity and pH may be used. Viscosity Range (mPa•s or cP): 1 – 100. pH Range: 5.5 ~ 8.5. Soaps containing reportable salts, chlorides and alcohols should be avoided. A complete Dispensing Chart and other relevant technical documents are available for all dispensers. EZ Fill™ Tested Soaps

KEY FEATURES & SPECIFICATIONS

- Individual Foam Soap dispenser
- Elegant Styling that matches the multi-feed dispensers
- Heavy Duty, Chrome Plated Brass
- Vanity Mounted
- Automatic - Battery or AC Option - "No Touch"
- Foam Soap in a Translucen Tank with 33.8 oz (1.0 L) Capacity

Operation & Maintenance

System shall operate each time an object is positioned within the sensing range of 1-3/16" to 3-15/16" [30 to 100] ± 3/8" [10] directly in front of the spout of the dispenser. A stream of foam soap will be pumped from the nozzle during each activation. Optional remote control unit Model #0393-R (supplied {one (1) per six (6) pack} or order separately) will allow owner programming of alternate dispense amounts and simplify priming when refilling soap container for initial setup and soap-out conditions. See Model #0393-R TDS and Owner's Manual for complete description of functions. Unit will dispense foam soap while batteries are at suitable charge level (or AC adapter is connected) and correct viscosity soap is present in the tank and system is correctly maintained to enable dispensing (LED is not flashing continuously or does not remain dark when trigger attempt is made). LED will display flash for sensing and continuous flashing for low battery condition (if AC Adapter is not utilized). Manual priming fill button on pump runs motor (or use 0390-R) for easy soap priming. Soap is manually replenished and batteries are replaced on service interval determined by maintenance schedule. See OM & IG for complete description of Features and Operations.

Technical Information / Product Properties

Property	Value
Dimensions	N/A
Construction	Heavy Duty Chrome Plated Brass
Mounting	Surface Mounted
Options	1A - Battery Operation, Bright Chrome 1A-41 - Battery Operation, Matte Black 1AC - AC Operation, Bright Chrome 1AC-41 - AC Operation, Matte Black 3AC - AU Model, AC Operation, Bright Chrome 3AC-41 - AU Model, AC Operation, Matte Black 6-1A - Battery Operation, Bright Chrome (6 Pk) 6-1A-41 - Battery Operation, Matte Black (6 Pk) 6-1AC - AC Operation, Bright Chrome (6 Pk) 6-1AC-41 - AC Operation, Matte Black (6 Pk) 6-3AC - AU Model, AC Operation, Bright Chrome (6 Pk) 6-3AC-41 - AU Model, AC Operation,Matte Black (6 Pk)

Installation

Install spout and sensor housing to vanity deck with anti-rotation kit escutcheon flange, rubber washers and basin nut (supplied) through 1-1/8" diameter [28 dia.] mounting hole and 5/32" diameter [4 dia.] adjacent hole for anti-rotation pin of escutcheon flange. Connect flex tubing from soap dispenser head to fitting on top of foam compressor. Connect com plug from dispenser head to com socket from foam compressor. Mount pump assembly with wall bracket to convenient structure under vanity within 24" [610] of L-fitting on foam compressor bottom with two (2) screws and wall anchors (supplied). Connect flex tubing from L-fitting on air compressor to fitting on top of pump assembly. Connect com plug from foam compressor to com socket from pump assembly. Mount battery compartment in convenient location under vanity deck with two (2) screws and wall anchors (supplied) within easy reach of extension cable length and plug connector into mating inline power connector. Install six (6) 'D'-size 1.5V cells (supplied by others) in under-deck battery compartment according to polarity indication, plug battery cable jack into battery box socket in cover handle and screw lock cover. Alternatively, plug AC Adapter into GFCI power outlet located under vanity within 13.5 ft (412 cm) of pump assembly and plug connector into mating inline power connector. See OM & IG provided in box with unit for complete installation details.

Warranty

Two (2) Years from date of Invoice

Manufacturer reserves the right to make changes to the design, dimensions or functionality of the product without formal notice.