


MOBILE SANITIZING STATIONS FS-0500 / FS-0700

TAKE A STAND FOR HYGIENE

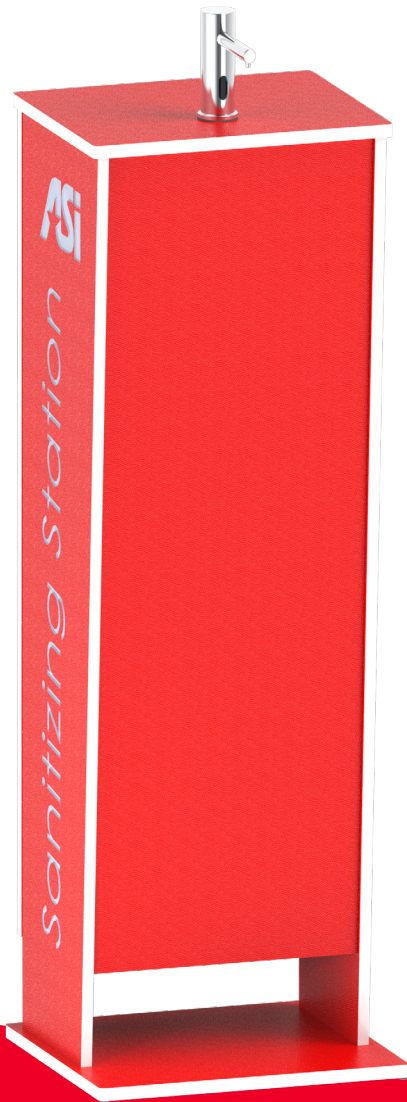

FS-0500 Antimicrobial
Solid Plastic (HDPE) Stand

- Tip-resistant design, with skid-resistant silicone tips on bottom of base to prevent sliding
- Smooth edges and corners for user safety
- Doors feature zero-clearance concealed hardware, and locks to prevent unauthorized access
- Assembled using 16 gauge Stainless Steel structural brackets
- Units are delivered pre-assembled
- High-capacity gel sanitizer dispenser is included*

* Dispenser is installed on site using pre-drilled holes



0390-HSD High Capacity
Hand Sanitizer Dispenser



FS-0700 Antimicrobial
Plastic Laminate Stand

NOW GERMS HAVE NOWHERE TO RUN

ASI's Mobile Sanitizing Stations offer facility managers flexibility, to relocate dispensing podiums to accommodate changing patterns of occupant traffic flow.



ASI Group
Integrated Building Products

FS-0500 (HDPE) SPECIFICATION

- Solid Plastic Sanitizer Station is constructed of 1/2" [13] thick high-impact resistant Solid Plastic (HDPE), with antimicrobial additives
- HDPE shall be co-extruded with red exterior and white inner core—convenient for stenciling logos
- Lettering on stand shall be routed exposing white core
- Stand shall be freestanding to enable placement by Facility Manager/Owner in any convenient location desired to serve occupant/visitor traffic
- Interior of stand is accessible from lockable door on back of stand
- Door shall be attached to back of stand with three (3) zero-clearance concealed cabinet hinges and shall be held closed with a keyed nickel-plated zinc cam lock

FS-0500A: Battery Powered

FS-0500AC: AC Powered

FS-0700 (PLAM) SPECIFICATION

- Plastic Laminate Sanitizer Station shall be constructed with panels made of antimicrobial plastic laminate bonded with non-toxic adhesive to particle board core and shall be 5/8" [16] thick
- Plastic Laminate color shall be Cosmic Strandz (see product page on website for reference)
- Stand shall be freestanding to enable placement by Facility Manager/Owner in any convenient location desired to serve occupant/visitor traffic
- Interior of stand is accessible from lockable door on back of stand
- Door shall be attached to back of stand with two (2) zero-clearance concealed cabinet hinges and shall be held closed with a keyed, nickel-plated zinc cam lock

FS-0700A: Battery Powered

FS-0700AC: AC Powered

0390-HSD (HAND SANITIZER DISPENSER) SPECIFICATION

- Included with FS-0500 and FS-0700 sanitizing stations to be assembled on site
- TOUCHLESS OPERATION powered by 6 D size batteries (not supplied) or AC adapter
- LED in sensor indicates function and battery condition
- All exposed surfaces have a polished chrome finish
- 1.6 Gal (6 L) tank capacity
- May be used with any hand sanitizer containing no abrasives, only within the viscosity range of 3.5k – 6.5k cP (mPa•s) and have a pH in range of 7±1.5

